


## SRV

Simple, Reliable, and Economical Residential Valve Built To Handle Tough Conditions

### KEY BENEFITS

- Application: Residential
- Size: 1" (25 mm)
- Double-beaded diaphragm seal design for superior leak-free performance
- Compatible with Hunter's DC Latching solenoids for use with battery operated controllers
- Captive bonnet bolts provide hassle-free valve maintenance
- Low flow capability allows use of Hunter's micro-irrigation products
- Encapsulated 24 VAC solenoid with captive plunger for hassle-free service
- Temperature rating: 66° C
- Warranty period: 2 years

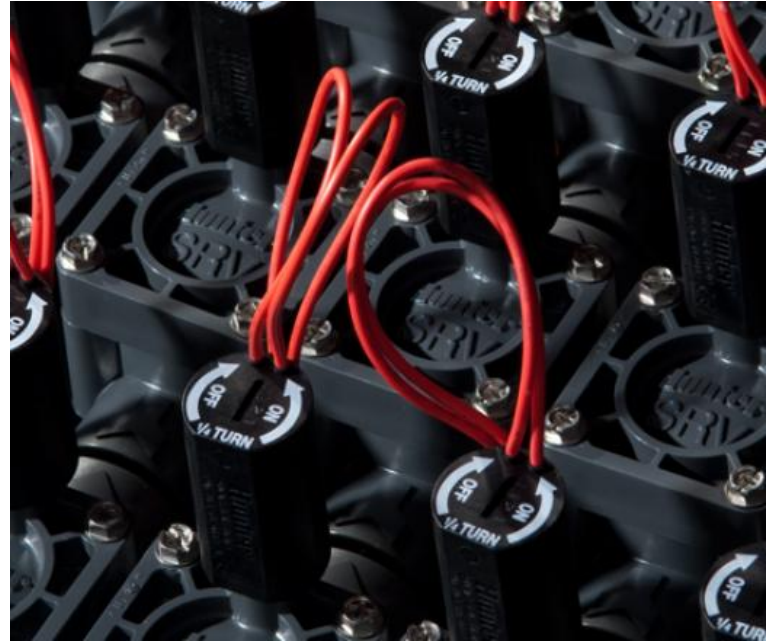

### Operating Specifications

- Flow rate: 0.25 to 9 m<sup>3</sup>/hr; 4 to 150 l/min
- Recommended pressure range: 1.5 to 10 bar; 150 to 1000 kPa

### Solenoid Specifications

- 24 VAC solenoid
  - 350 mA inrush, 190mA holding, 60 cycles
  - 370 mA inrush, 210mA holding, 50 cycles

### User Installed Options

- Solenoid conduit cover (P/N 464322)
- DC latching solenoid (P/N 458200)
- Accu-Sync pressure regulator

<b>SRV PRESSURE LOSS IN BAR</b>	
<b>Flow</b>	<b>1"</b>
<b>m<sup>3</sup>/hr</b>	<b>Globe</b>
0.3	0.08
1.0	0.10
2.5	0.13
3.5	0.13
4.5	0.21
5.5	0.30
7.0	0.43
8.0	0.77
9.0	0.96

<b>SRV PRESSURE LOSS IN KPA</b>	
<b>Flow</b>	<b>1"</b>
<b>l/min</b>	<b>Globe</b>
4	7.6
20	13
40	13
55	13
75	22
95	35
115	62
130	112
150	139

Copyright © 2024 Hunter Industries Inc. Hunter, the Hunter logo, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries.

<https://hunterirrigation.com/en-metric/irrigation-product/discontinued-models/srv-122324>