

Data Retrieval Unit

Come rain or come shine, Data Retrieval delivers with maximum efficiency

PRINCIPAIS BENEFÍCIOS

- Up to 6 sensors per unit and 16 units per system
- Powerful software functions in Surveyor™ for custom alarm reporting
- Stop watering based on adjustable wind speed and direction parameters
- All-weather lockable wall-mount metal cabinet
- Data monitored live or stored in non-volatile memory

ELECTRICAL SPECIFICATIONS

- Input Power: 105-125 VAC, 60 Hz at ½ amp maximum
- Input Power SV Version: 205-230 VAC, 50 Hz at ½ amp maximum

SIGNAL OUTPUT


- Wireless: UHF (450-470 MHz) 2 watt narrow-band radio
- Wired: Uses Hunter GCBL cable
- Use RASREM remote antenna with Radio Data Retrieval Unit, supplied separately

OPTIONS

- SV: 230 VAC, 50 Hz

SENSORS

- GENDATAN = Wind speed & direction
- GENDATFL = Flow sensor
- GENDATRC = Rain gauge
- Mini-Clik = Rain sensor
- Wind-Click = Wind sensor
- Freeze-Click = Freeze sensor
- MWS = Mini weather station
(Combines mini, wind- and freeze-clicks)

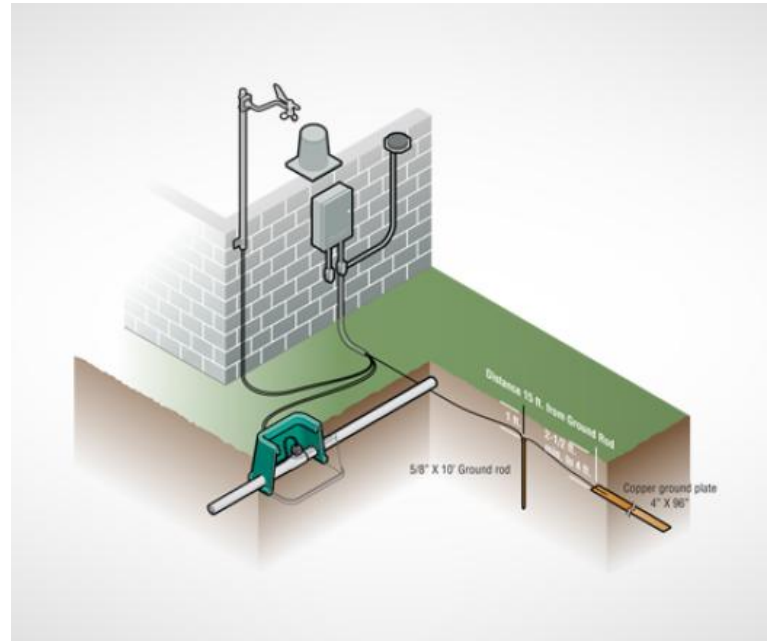



DAT

| | |
|--------|------|
| Height | 16" |
| Width | 12½" |
| Depth | 4¾" |

Copyright © 2025 Hunter Industries Inc. Hunter, the Hunter logo, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries.

<https://www.hunterirrigation.com/pt/node/26266>
010925