


## SRV

The SRV valve has been replaced by the enhanced PGV valve

### КЛЮЧЕВЫЕ ПРЕИМУЩЕСТВА

- Application: Residential
- Size: 1"
- Double-beaded diaphragm seal design for superior leak-free performance
- Compatible with Hunter's DC Latching solenoids for use with battery operated controllers
- Captive bonnet bolts provide hassle-free valve maintenance
- Low flow capability allows use of Hunter's micro-irrigation products
- Encapsulated 24 VAC solenoid with captive plunger for hassle-free service
- Temperature rating: 125° F
- Warranty period: 2 years

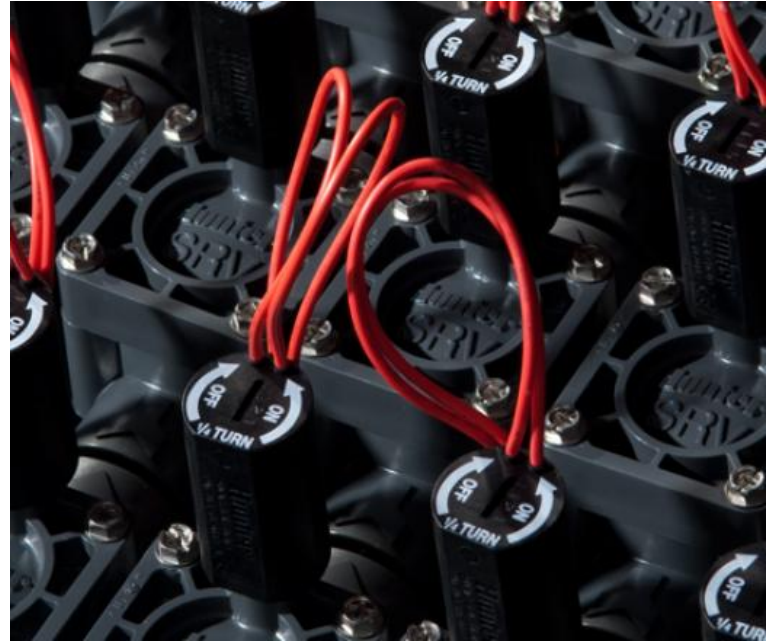

### Operating Specifications

- Flow rate: 1 to 40 GPM
- Recommended pressure range: 20 to 150 PSI

### Solenoid Specifications

- 24 VAC solenoid
  - 350 mA inrush, 190 mA holding, 60 cycles
  - 370 mA inrush, 210 mA holding, 50 cycles

### User Installed Options

- Solenoid conduit cover (P/N 464322)
- DC latching solenoid (P/N 458200)
- Accu-Sync pressure regulator

<b>SRV PRESSURE LOSS IN PSI</b>	
<b>Flow</b>	<b>1"</b>
<b>GPM</b>	<b>Globe</b>
1	1.1
5	1.9
10	1.9
15	1.6
20	5.0
30	9.1
35	16
40	20

Copyright © 2024 Hunter Industries Inc. Hunter, the Hunter logo, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries.

<https://hunterirrigation.com/ru/node/918>  
122324