



TTS PREMIUM GOLF ROTORS

DIG LESS, PLAY MORE WITH TTS ROTORS

Hunter®
GOLF

EIGHTEEN HOLES OF NOTHING BUT GREEN

FOR YEARS, HUNTER'S TTS GOLF ROTORS HAVE HELPED SUPERINTENDENTS AROUND THE WORLD enhance course playability and water efficiency in a whole new way. Built with all the durability, capability, and quality you'd expect from the world's #1 rotor manufacturer, these powerhouses also come with one huge advantage: Total Top Serviceability.

Patented TTS technology allows for every serviceable element of the rotor to be accessed through the top. Mechanical and electrical, big and small, you can get to every component simply from the playing surface. That means there's no more digging, no more unsightly scars, and more importantly, one less item on a busy superintendent's plate. **PLAY ON.**

- ▶ HUNTER INNOVATION STARTS AT THE TOP WITH OUR TTS ROTORS. EVERY SERVICEABLE COMPONENT CAN BE ACCESSED THROUGH THE TOP, INCLUDING SOLENOID SPLICE CONNECTIONS. NO DIGGING NECESSARY.



TTS FEATURES & BENEFITS

- ▶ **Exclusive and Unique Total Top Servicing Features:** The no-dig solution is appreciated by golfers, management and especially the superintendent
- ▶ **Unitized Inlet Valve Assembly:** Easy one-step removal of rock screen, valve seat and valve assembly
- ▶ **Through-the-Top Solenoid Connections:** Keeps wire splices protected in valve-box conditions with easy solenoid servicing
- ▶ **Large and Flexible Yardage Marker Capabilities:** Recessed area for placard markers—optional raised marker for popular engraved and paint-filled markers
- ▶ **Concealed Adjustable Pressure Regulation:** Stored within the flange compartment, prevents accidental adjustments

- ▶ **Upper Snap Rings with Integrated Wiper Seal:** Protects rotor's riser seal from external contamination such as top-dressing
- ▶ **Stainless Steel Seat in Pilot Valve:** Durable and corrosion-free, helps prevent slow leaks and weeping in the rotor
- ▶ **Pilot Valve Freeze Suppression Unit:** Patented technology prevents freeze damage—another TTS exclusive
- ▶ **Two-Stage Filtration in Valve Circuitry:** Anti-contamination filters in pilot valve and inlet valve protect critical valve-in-head passages
- ▶ **Convenient Circular Flange Design:** Offset riser and compartment allows quick and easy trimming around the rotor with motorized equipment
- ▶ **Through-the-Top Servicing of On-Off-Auto Selector:** Simple and inexpensive to replace, should damage occur



HUNTER TTS ROTORS WITH DIH TECHNOLOGY

The first and only Decoder-In-Head rotors with no-dig, top service capabilities.



◀ EASY DECODER PROGRAMMING
FROM THE SURFACE WITH THE ICD-HP.
FAST AND NO DISASSEMBLY REQUIRED.



DIH FEATURES & BENEFITS

- ▶ **Program decoders from the surface with no disassembly:** Simple, fast and easy to program before or after installation
- ▶ **Access decoders through the top with no digging required:** Servicing is a breeze and there's no mess with TTS DIH rotors
- ▶ **Individual decoder and solenoid components within flange compartment:** Isolated configuration minimizes maintenance costs year after year into the future
- ▶ **Seamless no-splice connection between decoder and solenoid:** With no connectors, maintains ongoing electrical continuity and peace of mind
- ▶ **Decoders are housed in the DIH rotor's unique flange compartment:** Improves playability and eliminates hundreds of unsightly decoder enclosures course-wide
- ▶ **DIH rotors include all the exclusive features and benefits of TTS rotors:** Hunter's no-dig solution is appreciated by golfers, management and the superintendent
- ▶ **Durability, efficiency and reliability housed in the only TTS DIH rotor in the industry:** Peace of mind from the #1 producer of gear-driven rotors in the world

TTS YARDAGE MARKER CAPABILITIES



◀ PLACARD STYLE



◀ DIRECT ENGRAVED

G900 Series



For mid to long-range rotor spacings up to 100 feet, the Hunter G900 Series is hard to beat. From the exclusive PressurePort™ nozzleing system to the new Contour back-nozzle capabilities and 8 low-angle nozzles, this TTS rotor is truly at the head of the class.

G900 SERIES FEATURES & BENEFITS

- ▶ **Includes All TTS Features and Benefits:** The ultimate combination of easy servicing, efficiency and durability
- ▶ **Ideal for Sites Requiring Wider Spacings:** Versatile long-distance radius capabilities suitable for an array of golf courses and sports fields
- ▶ **Exclusive PressurePort™ Technology:** Delivers uniform and consistent water coverage across a wide range of radius and flow capabilities
- ▶ **Standard and Low Trajectory Nozzles:** 8 Color-code nozzles with 22.5° trajectory plus 8 more with 15° trajectory
- ▶ **Full-Circle and Adjustable Part-Circle Models:** Adjustable anytime; uninstalled, installed, or while in operation
- ▶ **Contour "Back-Nozzle" Capabilities:** Over 30 nozzle options available to help smooth and shape distinct perimeter transitions or correct problem areas around the course

◀ NEW CONTOUR "BACK-NOZZLE" CAPABILITIES

Choose any nozzle from the PGP, I-40, and G70 nozzle racks, or from the short and mid-range G900 nozzles.

CHARTS & SPECIFICATIONS

MODEL SPECIFICATIONS

G990: Full Circle

G995: Adjustable Arc (40° to 360°)

MODEL VARIATIONS

C: Check-O-Matic

D: Decoder-in-Head

E: Electric Valve-in-Head

DIMENSIONS

- Pop-up height: 3"
- Female inlet: 1½" ACME
- Flange diameter: 7½"
- Overall height: 13¼"

OPERATING SPECIFICATIONS*

G990

- Discharge rate: 30.5 to 83.3 GPM
- Radius: 73' to 103'
- Pressure range: 80 to 120 PSI

G995

- Discharge rate: 29.5 to 83.8 GPM
- Radius: 75' to 104'
- Pressure range: 80 to 120 PSI

* All TTS rotors pressure rated at 150 PSI

G990 Nozzle Performance Data*						
Nozzle	Pressure PSI	Radius Feet	Flow GPM	Precip. in/hr	■	▲
25 	80	73	30.5	0.55	0.64	
	90	75	32.4	0.55	0.64	
	100	76	34.3	0.57	0.66	
	110	78	36.5	0.58	0.67	
	120	79	38.4	0.59	0.68	
	80	77	36.3	0.59	0.68	
33 	90	78	38.4	0.61	0.70	
	100	80	40.6	0.61	0.71	
	110	81	42.7	0.63	0.72	
	120	82	44.9	0.64	0.74	
	80	80	40.6	0.61	0.71	
	90	82	42.9	0.61	0.71	
38 	100	83	45.3	0.63	0.73	
	110	85	47.7	0.64	0.73	
	120	86	50.2	0.65	0.75	
	80	83	46.2	0.65	0.75	
	90	84	48.6	0.66	0.77	
	100	85	50.9	0.68	0.78	
43 	110	86	53.4	0.69	0.80	
	120	87	55.9	0.71	0.82	
	80	86	49.6	0.65	0.75	
	90	89	52.5	0.64	0.74	
	100	90	54.8	0.65	0.75	
	110	91	57.3	0.67	0.77	
48 	80	89	54.2	0.66	0.76	
	90	90	56.7	0.67	0.78	
	100	92	59.2	0.67	0.78	
	110	93	61.7	0.69	0.79	
	80	92	63.2	0.72	0.83	
	90	94	65.9	0.72	0.83	
53 	100	96	69.4	0.72	0.84	
	110	97	72.0	0.74	0.85	
	80	96	72.1	0.75	0.87	
	90	98	75.0	0.75	0.87	
	100	99	77.8	0.76	0.88	
	110	102	80.5	0.74	0.86	
63 	120	103	83.3	0.76	0.87	
	80	98	75.4	0.76	0.87	
	90	100	78.1	0.75	0.87	
	100	102	80.9	0.75	0.86	
	110	104	83.8	0.75	0.86	
	120	104	83.8	0.75	0.86	
73 	80	96	72.7	0.76	0.88	
	90	98	75.4	0.76	0.87	
	100	100	78.1	0.75	0.87	
	110	102	80.9	0.75	0.86	
	120	104	83.8	0.75	0.86	
	80	96	72.7	0.76	0.88	

G995 Nozzle Performance Data*						
Nozzle	Pressure PSI	Radius Feet	Flow GPM	Precip. in/hr	■	▲
25 	80	75	29.5	0.50	0.58	
	90	76	31.5	0.52	0.61	
	100	77	33.2	0.54	0.62	
	110	78	35.6	0.56	0.65	
	120	79	37.5	0.58	0.67	
	80	77	36.2	0.59	0.68	
33 	90	78	38.2	0.60	0.70	
	100	79	40.4	0.62	0.72	
	110	81	42.6	0.62	0.72	
	120	82	44.8	0.64	0.74	
	80	80	40.6	0.61	0.71	
	90	82	43.0	0.62	0.71	
38 	100	84	45.4	0.62	0.72	
	110	85	47.6	0.63	0.73	
	120	86	50.0	0.65	0.75	
	80	84	46.1	0.63	0.73	
	90	85	48.5	0.65	0.75	
	100	85	50.7	0.68	0.78	
43 	110	86	53.4	0.69	0.80	
	120	87	55.7	0.71	0.82	
	80	88	50.2	0.62	0.72	
	90	89	52.6	0.64	0.74	
	100	90	55.1	0.65	0.76	
	110	92	57.5	0.65	0.76	
48 	120	88	54.9	0.64	0.74	
	90	91	57.2	0.66	0.77	
	100	92	59.5	0.68	0.78	
	110	93	62.1	0.69	0.80	
	80	93	62.3	0.69	0.80	
	90	94	65.5	0.71	0.82	
53 	100	95	69.0	0.74	0.85	
	110	96	71.9	0.75	0.87	
	80	96	72.7	0.76	0.88	
	90	98	75.4	0.76	0.87	
	100	100	78.1	0.75	0.87	
	110	102	80.9	0.75	0.86	
63 	120	104	83.8	0.75	0.86	
	80	96	72.7	0.76	0.88	
	90	98	75.4	0.76	0.87	
	100	100	78.1	0.75	0.87	
	110	102	80.9	0.75	0.86	
	120	104	83.8	0.75	0.86	
73 	80	96	72.7	0.76	0.88	
	90	98	75.4	0.76	0.87	
	100	100	78.1	0.75	0.87	
	110	102	80.9	0.75	0.86	
	120	104	83.8	0.75	0.86	
	80	96	72.7	0.76	0.88	

* Complies to ASAE standard.
All precipitation rates calculated
for 360° operation. All triangular
rates are equilateral. Preliminary
performance.

SPECIFICATION BUILDER

EXAMPLE

MODEL	VALVE OPTIONS	NOZZLE	PRESSURE REGULATION*	OPTIONS
G990	C = Check-O-Matic * D = Decoder Valve-In-Head E = Electric Valve-In-Head	25 to 73 = Installed G990 Nozzle *	P8 = 80 PSI P1 = 100 PSI P2 = 120 PSI	S = SSU *
G995 = Adjustable Arc 40 to 360°	C = Check-O-Matic * D = Decoder Valve-In-Head E = Electric Valve-In-Head * Converts to N.O. Hydraulic Valve-In-Head	25 to 73 = Installed G995 Nozzle *	P8 = 80 PSI P1 = 100 PSI P2 = 120 PSI * SSU = #25 or #53	S = SSU * * Standard Stocking Unit

• **G990E - 53 - P8 - S**

Hunter
GOLF

G800 Series



The ultimate TTS solution for short and mid-range golf applications. The G800 Series rotors are reliable and efficient performers that make easy maintenance a top priority. New for this year, two 50° to 360° adjustable models with non-reversing full-circle capabilities. The best TTS mid-range rotors just got better.

G800 SERIES FEATURES & BENEFITS

- ▶ **Includes All TTS Features & Benefits:** The ultimate combination of servicing-ease, efficiency and durability
- ▶ **Ideal For Sites Requiring Mid-Range Spacing:** An array of mid-distance radius capabilities for golf courses and sports fields
- ▶ **Exclusive PressurePort™ Technology:** Delivers uniform and consistent water coverage across a wide range of radius and flow capabilities
- ▶ **Closed-Case Design:** Helps prevent sticking risers and leaking seals caused by contaminants
- ▶ **Full-Circle and Full-Circle/Part-Circle Models:** Adjustable from 50° to non-reversing 360° anytime; uninstalled, installed or while in operation

G870 This dedicated full-circle is designed specifically for mid-range areas with 50' to 70' spacings.

G880 This dedicated full-circle is designed specifically for mid to longer-range areas with 60' to 85' spacings.

G835 This full-circle/part-circle adjustable is designed specifically for smaller areas with 18' up to 50' spacings.

G875 This full-circle/part-circle adjustable is designed specifically for mid-range areas with 55' up to 70' spacings.



CHARTS & SPECIFICATIONS

MODEL SPECIFICATIONS

- G870:** Full Circle
- G880:** Full Circle
- G835:** Full-Circle/Part-Circle
- G875:** Full-Circle/Part-Circle

MODEL VARIATIONS

- C:** Check-O-Matic
- D:** Decoder-In-Head
- E:** Electric Valve-In-Head

DIMENSIONS

- Pop-up height: 3"
- Female inlet: 1½" ACME
- Flange diameter: 7¼"
- Overall height: 11¾"

OPERATING SPECIFICATIONS*

G870

- Discharge rate: 13 to 33.7 GPM
- Radius: 53' to 75'
- Pressure range: 50 to 100 PSI

G835

- Discharge rate: 1.9 to 12.8 GPM
- Radius: 18' to 50'
- Pressure range: 40 to 65 PSI

G880

- Discharge rate: 22.5 to 57.9 GPM
- Radius: 67' to 88'
- Pressure range: 65 to 100 PSI

G875

- Discharge rate: 13.4 to 32.3 GPM
- Radius: 57' to 71'
- Pressure range: 50 to 100 PSI

* All TTS rotors pressure rated at 150 PSI

G870 Nozzle Performance Data*						
Nozzle	Pressure PSI	Radius Feet	Flow GPM	Precip. in/hr	■	▲
15 	50	53	13.0	0.45	0.51	
	60	54	14.1	0.47	0.54	
	65	55	14.8	0.47	0.54	
	70	56	15.5	0.48	0.55	
	80	58	16.3	0.47	0.54	
	80	58	16.3	0.47	0.54	
18 	50	58	14.2	0.41	0.47	
	60	59	15.9	0.44	0.51	
	65	60	16.3	0.44	0.50	
	70	60	16.9	0.45	0.52	
	80	61	17.8	0.46	0.53	
	80	61	17.8	0.46	0.53	
20 	60	61	18.8	0.49	0.56	
	65	62	19.6	0.49	0.57	
	70	63	20.5	0.50	0.57	
	80	64	22.0	0.52	0.60	
	90	64	23.4	0.55	0.63	
	90	64	23.4	0.55	0.63	
23 	60	63	20.1	0.49	0.56	
	65	65	21.0	0.48	0.55	
	70	65	21.9	0.50	0.58	
	80	66	23.4	0.52	0.60	
	90	67	24.9	0.53	0.62	
	90	67	24.9	0.53	0.62	
25 	60	65	21.8	0.50	0.57	
	65	67	22.5	0.48	0.56	
	70	67	23.6	0.51	0.58	
	80	69	25.3	0.51	0.59	
	90	71	26.9	0.51	0.59	
	90	71	26.9	0.51	0.59	
28 	70	71	28.1	0.54	0.62	
	80	71	29.9	0.57	0.66	
	90	73	31.8	0.57	0.66	
	100	75	33.7	0.58	0.67	
	100	75	33.7	0.58	0.67	

G880 Nozzle Performance Data*						
Nozzle	Pressure PSI	Radius Feet	Flow GPM	Precip. in/hr	■	▲
25 	65	67	22.5	0.48	0.56	
	70	69	23.9	0.48	0.56	
	80	71	26.0	0.50	0.57	
	90	72	27.9	0.52	0.60	
	100	73	29.8	0.54	0.62	
	100	73	29.8	0.54	0.62	
33 	65	73	31.0	0.56	0.65	
	70	74	32.2	0.57	0.65	
	80	76	34.7	0.58	0.67	
	90	77	37.0	0.60	0.69	
	100	78	38.8	0.61	0.71	
	100	78	38.8	0.61	0.71	
38 	65	76	35.1	0.58	0.68	
	70	77	36.3	0.59	0.68	
	80	79	38.5	0.59	0.69	
	90	80	40.5	0.61	0.70	
	100	81	42.9	0.63	0.73	
	100	81	42.9	0.63	0.73	
43 	65	78	39.2	0.62	0.72	
	70	79	40.8	0.63	0.73	
	80	82	43.7	0.63	0.72	
	90	83	46.5	0.65	0.75	
	100	84	48.8	0.67	0.77	
	100	84	48.8	0.67	0.77	
48 	65	82	43.8	0.63	0.72	
	70	83	46.3	0.65	0.75	
	80	85	49.0	0.65	0.75	
	90	86	51.9	0.68	0.78	
	100	87	54.4	0.69	0.80	
	100	87	54.4	0.69	0.80	
53 	65	83	46.9	0.66	0.76	
	70	84	49.1	0.67	0.77	
	80	87	52.6	0.67	0.77	
	90	88	54.8	0.68	0.79	
	100	88	57.9	0.72	0.83	
	100	88	57.9	0.72	0.83	

G835 Nozzle Performance Data*						
Nozzle Yellow	Pressure PSI	Radius Feet	Flow GPM	Precip. in/hr	■	▲
2 	40	18	1.9	0.56	0.65	
	50	20	2.1	0.51	0.58	
	60	22	2.4	0.48	0.55	
	65	23	2.6	0.47	0.55	
	40	23	3.0	0.55	0.63	
	50	25	3.2	0.49	0.57	
3 	60	27	3.5	0.46	0.53	
	65	28	3.6	0.44	0.51	
	40	25	3.9	0.60	0.69	
	50	30	4.4	0.47	0.54	
	60	31	4.6	0.46	0.53	
	65	35	5.4	0.42	0.49	
4 	40	29	4.7	0.54	0.62	
	50	32	5.0	0.47	0.54	
	60	33	5.3	0.47	0.54	
	65	39	6.8	0.43	0.50	
	40	32	6.0	0.56	0.65	
	50	35	6.3	0.50	0.57	
5 	60	37	6.6	0.46	0.54	
	65	39	8.5	0.44	0.51	
	40	39	9.7	0.61	0.71	
	50	43	10.1	0.53	0.61	
	60	45	10.3	0.49	0.57	
	65	47	10.5	0.46	0.53	
8 	40	44	12.0	0.60	0.69	
	50	47	12.2	0.53	0.61	
	60	48	12.5	0.52	0.60	
	65	50	12.8	0.49	0.57	
	40	44	12.0	0.60	0.69	
	50	47	12.2	0.53	0.61	
10 	50	43	10.1	0.53	0.61	
	60	45	10.3	0.49	0.57	
	65	47	10.5	0.46	0.53	
	40	44	12.0	0.60	0.69	
	50	47	12.2	0.53	0.61	
	60	48	12.5	0.52	0.60	
12 	50	47	12.2	0.53	0.61	
	60	48	12.5	0.52	0.60	
	65	50	12.8	0.49	0.57	
	40	44	12.0	0.60	0.69	
	50	47	12.2	0.53	0.61	
	60	48	12.5	0.52	0.60	

G875 Nozzle Performance Data*						
Nozzle	Pressure PSI	Radius Feet	Flow GPM	Precip. in/hr	■	▲
15 	50	57	13.4	0.40	0.46	
	60	58	14.3	0.41	0.47	
	65	59	14.8	0.41	0.47	
	70	59	15.3	0.42	0.49	
	80	60	16.4	0.44	0.51	
	80	60	16.4	0.44	0.51	
18 	50	60	14.5	0.39	0.45	
	60	61	15.7	0.41	0.47	
	65	61	16.3	0.42	0.49	
	70	62	16.9	0.42	0.49	
	80	63	18.2	0.44	0.51	
	80	63	18.2	0.44	0.51	
20 	60	62	17.8	0.45	0.51	
	65	62	18.2	0.46	0.53	
	70	63	19.2	0.47	0.54	
	80	64	20.5	0.48	0.56	
	90	65	21.8	0.50	0.57	
	90	65	21.8	0.50	0.57	
23 	60	64	21.9	0.51	0.59	
	65	65	21.4	0.49	0.56	
	70	65	23.6	0.54	0.62	
	80	66	25.6	0.57	0.65	
	90	67	27.0	0.58	0.67	
	90	67	27.0	0.58	0.67	
25 	60					

B Series



Designed for unique short and mid-range areas on courses with block-type systems or, the perfect solution for those on a tight budget, the B Series TTS rotors are the ideal choice to meet the need. A time-tested gear drive, through-the-top servicing, yardage marker capabilities and now, two models with non-reversing full-circle and adjustable arc in one rotor.

B SERIES FEATURES&BENEFITS

- ▶ **Exclusive PressurePort™ Nozzling:** Improves distribution uniformity
- ▶ **Color-Coded Nozzles:** Truly uniform coverage and fast identification
- ▶ **Through-the-Top Serviceability:** Enables easy access to gear-drive, filter screen and check valve
- ▶ **Closed-Case Rotor:** Absolute protection from dirt and debris
- ▶ **Proven, Heavy-Duty Gear Drive:** Enduring reliability
- ▶ **Impact-Resistant Flanged Body:** Provides stability and protection from heavy equipment damage
- ▶ **Water-Activated Riser Seal:** Clean flushing action and positive retraction
- ▶ **Yardage Marker Recessed Area:** Provides protected location for yardage marker plaque

G70B This dedicated full-circle is designed specifically for mid-range areas with 50' to 70' spacings.

G35B This full-circle/part-circle adjustable is designed specifically for smaller areas with 18' up to 50' spacings.

G75B This full-circle/part-circle adjustable is designed specifically for mid-range areas with 55' up to 70' spacings.



CHARTS & SPECIFICATIONS

MODEL SPECIFICATIONS

- G70B:** Full circle
- G35B:** Full-Circle/Part-Circle
- G75B:** Full-Circle/Part-Circle

MODEL VARIATIONS

G70B/G35B/G75B: Block checks up to 10' in elevation change

DIMENSIONS

- Pop-up height: 3"
- Female inlet: 1 1/4" ACME
- Flange diameter: 4 1/4"
- Overall height: 9"

OPERATING SPECIFICATIONS

G70B

- Discharge rate: 13 to 33.7 GPM
- Radius: 53' to 75'
- Pressure range: 50 to 100 PSI

G35B

- Discharge rate: 1.9 to 12.8 GPM
- Radius: 18' to 50'
- Pressure range: 40 to 65 PSI

G75B

- Discharge rate: 7.7 to 32.3 GPM
- Radius: 47' to 71'
- Pressure range: 40 to 100 PSI

G70B Nozzle Performance Data*						
Nozzle	Pressure PSI	Radius Feet	Flow GPM	Precip. in/hr	■	▲
15 	50	53	13.0	0.45	0.51	
	60	54	14.1	0.47	0.54	
	65	55	14.8	0.47	0.54	
	70	56	15.5	0.48	0.55	
	80	58	16.3	0.47	0.54	
	90	60	17.0	0.46	0.53	
18 	50	58	14.2	0.41	0.47	
	60	59	15.9	0.44	0.51	
	65	60	16.3	0.44	0.50	
	70	60	16.9	0.45	0.52	
	80	61	17.8	0.46	0.53	
	90	64	18.8	0.49	0.56	
20 	60	61	19.6	0.49	0.57	
	65	62	20.5	0.50	0.57	
	70	63	20.5	0.50	0.57	
	80	64	22.0	0.52	0.60	
	90	64	23.4	0.55	0.63	
	95	66	24.9	0.53	0.62	
23 	60	63	20.1	0.49	0.56	
	65	65	21.0	0.48	0.55	
	70	65	21.9	0.50	0.58	
	80	66	23.4	0.52	0.60	
	90	67	24.9	0.53	0.62	
	95	68	25.3	0.51	0.61	
25 	60	65	21.8	0.50	0.57	
	65	67	22.5	0.48	0.56	
	70	67	23.6	0.51	0.58	
	80	69	25.3	0.51	0.59	
	90	71	26.9	0.51	0.59	
	95	72	28.1	0.54	0.62	
28 	70	71	29.9	0.57	0.66	
	80	71	31.8	0.57	0.66	
	90	73	33.7	0.58	0.67	
	95	75	33.7	0.58	0.67	

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral. G35B preliminary performance.

G35B Nozzle Performance Data*						
Nozzle Yellow	Pressure PSI	Radius Feet	Flow GPM	Precip. in/hr	■	▲
2 	40	18	1.9	0.56	0.65	
	50	20	2.1	0.51	0.58	
	60	22	2.4	0.48	0.55	
	65	23	2.6	0.47	0.55	
	70	23	3.0	0.55	0.63	
	75	25	3.2	0.49	0.57	
3 	50	27	3.5	0.46	0.53	
	60	28	3.6	0.44	0.51	
	65	29	4.7	0.54	0.62	
	70	28	4.1	0.50	0.58	
	75	30	4.4	0.47	0.54	
	80	31	4.6	0.46	0.53	
4 	40	25	3.9	0.60	0.69	
	50	28	4.1	0.50	0.58	
	60	30	4.4	0.47	0.54	
	65	31	4.6	0.46	0.53	
	70	29	4.7	0.54	0.62	
	75	32	5.0	0.47	0.54	
5 	50	32	5.0	0.47	0.54	
	60	33	5.3	0.47	0.54	
	65	35	5.4	0.42	0.49	
	70	32	6.0	0.56	0.65	
	75	35	6.3	0.50	0.57	
	80	37	6.6	0.46	0.54	
6 	40	32	6.0	0.56	0.65	
	50	35	6.3	0.50	0.57	
	60	37	6.6	0.46	0.54	
	65	39	6.8	0.43	0.50	
	70	36	7.8	0.58	0.67	
	75	39	8.0	0.51	0.58	
8 	50	42	8.3	0.45	0.52	
	60	43	8.5	0.44	0.51	
	65	43	9.7	0.61	0.71	
	70	43	10.1	0.53	0.61	
	75	45	10.3	0.49	0.57	
	80	47	10.5	0.46	0.53	
10 	40	39	12.0	0.60	0.69	
	50	43	12.2	0.53	0.61	
	60	45	12.5	0.52	0.60	
	65	47	12.8	0.49	0.57	
	70	48	13.0	0.55	0.63	
	75	50	13.2	0.52	0.61	
12 	50	47	13.0	0.60	0.69	
	60	48	13.2	0.53	0.61	
	65	50	13.4	0.50	0.58	
	70	49	13.6	0.48	0.56	
	75	51	13.8	0.45	0.54	
	80	52	14.0	0.43	0.52	

G75B Nozzle Performance Data*						
Nozzle	Pressure PSI	Radius Feet	Flow GPM	Precip. in/hr	■	▲
8 	40	47	7.7	0.34	0.39	
	50	49	8.3	0.33	0.38	
	60	50	9.2	0.35	0.41	
	65	50	9.5	0.37	0.42	
	70	51	9.9	0.37	0.42	
	75	52	10.3	0.37	0.43	
10 	50	53	10.9	0.37	0.43	
	60	54	12.0	0.40	0.46	
	65	54	12.5	0.41	0.48	
	70	55	13.1	0.42	0.48	
	75	56	14.3	0.44	0.51	
	80	57	14.3	0.42	0.49	
13 	50	55	11.2	0.36	0.41	
	60	56	12.3	0.38	0.44	
	65	56	12.8	0.39	0.45	
	70	57	13.3	0.39	0.45	
	75	57	14.3	0.42	0.49	
	80	58	14.4	0.44	0.51	
15 	50	57	13.4	0.40	0.46	
	60	58	14.3	0.41	0.47	
	65	59	14.8	0.41	0.47	
	70	59	15.3	0.42	0.49	
	75	60	16.4	0.44	0.51	
	80	61	17.8	0.45	0.51	
18 	60	61	15.7	0.41	0.47	
	65	61	16.3	0.42	0.49	
	70	62	16.9	0.42	0.49	
	75	63	18.2	0.44	0.51	
	80	64	20.5	0.48	0.56	
	85	65	21.8	0.50	0.57	
20 	60	62	17.8	0.45	0.51	
	65	62	18.2	0.46	0.53	
	70	63	19.2	0.47	0.54	
	75	64	20.5	0.48	0.56	
	80	65	21.8	0.50	0.57	
	85	66	23.0	0.51	0.59	
23 	60	64	21.9	0.51	0.59	
	65	65	21.4	0.49	0.56	
	70	65	23.6	0.54	0.62	
	75	66	25.6	0.57	0.65	
	80	67	27.0	0.58	0.67	
	85	68	28.0	0.55	0.64	
25 	60	65	23.5	0.54	0.62	
	65	65	24.8	0.56	0.65	
	70	67	25.6	0.55	0.63	
	75	69	27.3	0.55	0.64	
	80	71	29.0	0.55	0.64	
	85	71	30.6	0.60	0.69	
28 	70	66	26.9	0.59	0.69	
	75	68	28.9	0.60	0.69	
	80	70	30.6	0.60	0.69	
	85	71	32.3	0.62	0.71	

EXAMPLE
G70B - 28 - S

MODEL **VALVE OPTIONS** **NOZZLE** **OPTIONS**

G70 = Full Circle

B = Block rotor with check valve

15 to 28 = Installed G70 Nozzle *


S = SSU *

6 = Installed G35 Nozzle *

S = SSU *

8 to 28 = Installed G75 Nozzle *

* Standard Stocking Unit

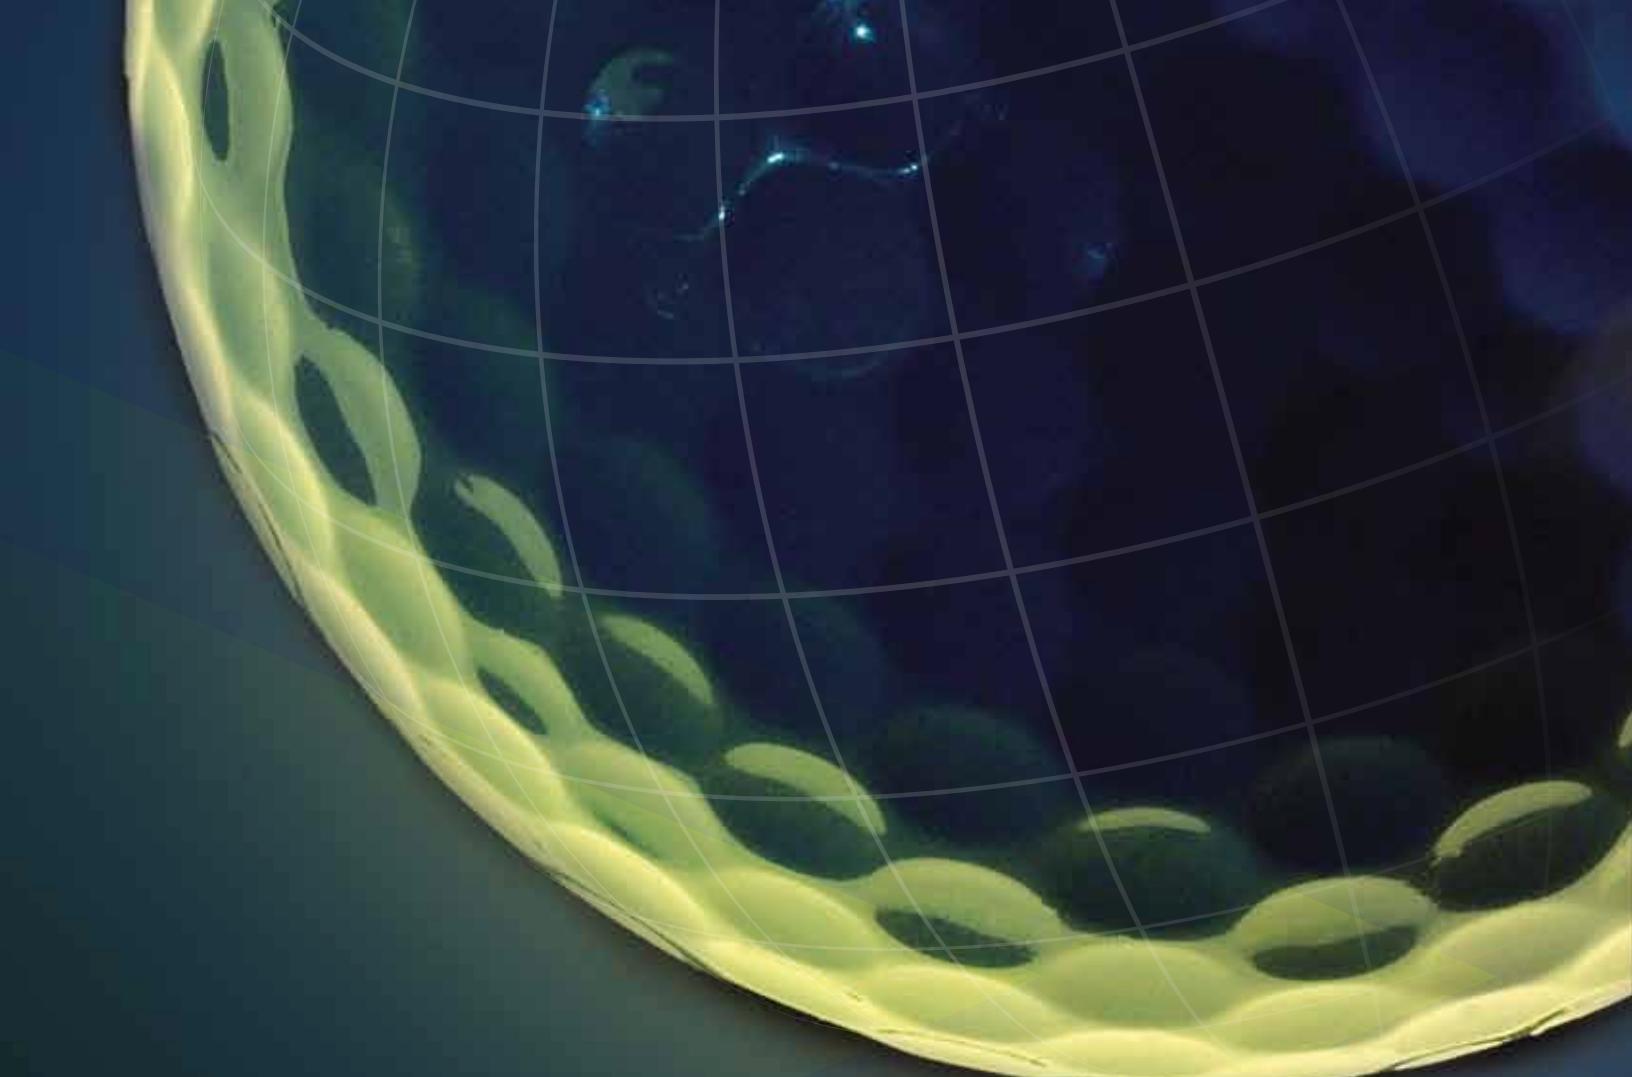

U.S.A. HEADQUARTERS AND MANUFACTURING

1940 Diamond Street
San Marcos, CA 92078
Tel: (1) 760-744-5240
Fax: (1) 760-744-7461
Technical Help: (1) 760-591-7383

WORLDWIDE OFFICES

Australia

8 The Parade West
Kent Town, South Australia 5067
Tel: (61) 8-8363-3599
Fax: (61) 8-8363-3687

Europe

Avda. Diagonal 523, 5°- 2°
Edificio Atalaya
08029 Barcelona, Spain
Tel: (34) 9-34-94-88-81
Fax: (34) 9-34-19-76-76

Middle East

P.O. Box 211303
Amman 11121, Jordan
Tel: (962) 6-515-2882
Fax: (962) 6-515-2992

China

B1618, Huibin Office Bldg.
No.8, Beichen Dong Street
Beijing 100101, China
Tel 1/Fax: (86) 10-84975146
Tel 2: (86) 13-901321516

Dedicated to conserving water on and
off the course, all over the world.

WWW.HUNTERGOLF.COM

FSC FPO



PRINTED ON RECYCLED PAPER. PLEASE RECYCLE

© 2011 Hunter Industries Incorporated. Printed in USA.
GLIT-037 A 1/11