# **MP STAKE**


Designed for easy implementation with any water-efficient MP Rotator nozzle, MP Stake Kits come preassembled for quick installation in the field.

## **KEY BENEFITS**

- Pair with any high-efficiency MP Rotator nozzle to simplify temporary irrigation
- · Preassembled for fast and easy installation in the field
- Standard kit includes a 66 cm stake, nozzle adapter, 0.345" tubing, and  $\frac{1}{2}$ " threaded male fitting for quick connection
- For maximum water savings, upgrade to a 2.8 bar (280 kPa) pressure regulator and Hunter Check Valve Kit

### **OPERATING SPECIFICATIONS**

• Operational pressure range: 2.1 to 4.8 bar (210 to 480 kPa)

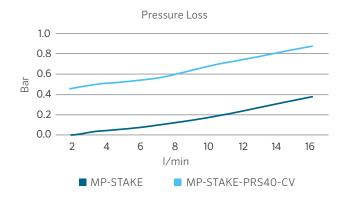



**MP-STAKE** Total height: 71 cm Male threaded connection: ½" **MP-STAKE-PRS40-CV** Total height: 86 cm Male threaded connection: ½"

#### Compatible with:



All MP Rotator Nozzles



MP-STAKE MODELS	
Model	Description
MP-STAKE	66 cm stake, 0.345" tubing to $^{1\!\!/}_2$ " male fitting, PROS-00 shrub (total height: 71 cm)
MP-STAKE-PRS40-CV	66 cm stake, 0.345" tubing to ½" male fitting, Hunter Check Valve, PROS-00-PRS40 pressure-regulated shrub adapter (total height:86 cm)

#### MP-STAKE-PRS40-CV Installation



#### Models: Standard and Pressure-Regulating Staking Kits

Hunter<sup>®</sup>